
# electrica

# **USER MANUAL**

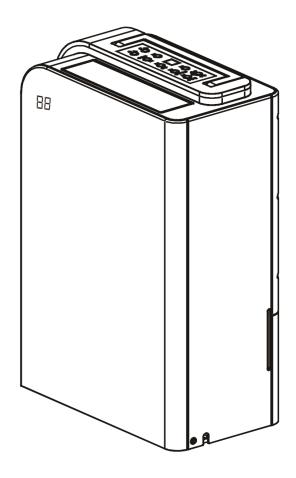

# DESD9LW PREMIUM DESICCANT DEHUMIDIFIER WITH ADVANCED TECHNOLOGY ASTHMA AND ALLERGY FRIENDLY AIR PURIFIER AND SMART APP CONTROL

Thank you for choosing electriQ

Please read this user manual before using this innovative dehumidifier and keep it safe for future reference

# **CONTENTS**

| SAFETY INSTRUCTIONS          | 3  |
|------------------------------|----|
| FEATURES                     | 5  |
| PARTS                        | 6  |
| CONTROL PANEL                | 7  |
| QUICK REFERENCE GUIDE        | 11 |
| OTHER FEATURES               | 13 |
| POSITIONING THE DEHUMIDIFIER | 13 |
| WATER DRAINAGE               | 14 |
| SET UP AND USE OF APP        | 15 |
| CARE AND MAINTENANCE         | 25 |
| TROUBLESHOOTING              | 26 |
| TECHNICAL SPECIFICATION      | 28 |

### SAFETY INSTRUCTIONS

### **IMPORTANT**

- Carefully read the instructions before operating the unit.
- This appliance only intended for use in an indoor domestic environment.
   Any other use is not recommended by the manufacturer and may cause fire, electrical shock or other injuries to person or damage to property.
- Rating: This unit must only be connected to an AC 220-240V / 50 Hz earthed outlet. Installation must be in accordance with the regulations of the country where the unit is used.
- If you are in any doubt about the suitability of your electrical supply, have it checked and, if necessary, modified by a qualified electrician.
- This dehumidifier has been tested and is safe to use. However, as with any electrical appliance care must be taken during use.
- Disconnect the power from the appliance before dismantling, assembling or cleaning.
- Avoid touching any moving parts of the appliance.
- Never insert fingers, pencils or any other objects through the guard.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities. It is also not intended for use by those with a lack of experience and knowledge unless they have been given supervision or instruction concerning the use of the appliance by a person responsible for their safety.
- Do not leave children unsupervised with this appliance.
- Do not clean the unit by spraying it or immersing it in water.
- Never connect the unit to an electrical outlet using an extension cord. If a
  power outlet is not available, one should be installed by a qualified
  electrician.
- Never operate this appliance if the cord, power adapter or plug is damaged. Ensure the power cord is not stretched or exposed to sharp object/edges.
- A damaged power supply cord should be replaced by the manufacturer or a qualified electrician in order to avoid a hazard.
- Any service other than regular cleaning or filter replacement should be performed by an authorized service representative. Failure to comply could result in a voided warranty.

- Do not use the appliance for any purpose other than its intended use.
- Do not tilt the unit while in use. The unit is designed to work only in a vertical position. This dehumidifier must always be stored upright, otherwise irreparable damage may be caused.
- This unit will still operate for approximatively 3-4 minute after pressing the power button to turn off. This is normal and ensures the desiccant wheel is drained of water. Avoid restarting the dehumidifier until 5 minutes have passed after being turned off.
- Never use the mains plug as a switch to start or turn off the dehumidifier.
   Use the provided power button located on the control panel.
- Always place the unit on a dry and stable surface.
- The appliance should not be installed in a laundry or wet room where the humidity is higher than 85% RH. This unit should be operated at an ambient temperature between 1°C and 32°C.
- Do not dry laundry directly above the unit. To prevent water from entering the dehumidifier, laundry should be placed at least 40 cm away from your dehumidifier.
- Do not place the unit next to heat sources (e.g. electrical fires, fireplaces, etc.)
- Desiccant dehumidifiers tend to absorb odours from the surrounding environment like cigarettes, cooking, cosmetics, new furniture etc. This smell is described as a burning or sour smell. This is released during operation as the zeolite disc is heated. This is not a sign of a fault and the smell will fade after usage.
- Do not store or use gasoline, petrol, paint, solvents or other flammable vapours and liquids in the vicinity of this dehumidifier or any other appliance. Do not use dehumidifiers where flammable gases or VOC can be released or accumulate.

### **ENERGY SAVING AND UNIT SAFETY PROTECTION TIPS**

Do not cover or restrict the airflow from the outlet or inlet grills.

For maximum performance, the unit should be operated at least 20 cm away from walls and 50 cm from other objects within the room.

Keep the filters and grills of the appliance clean. Under normal conditions, filters and grills should only need cleaning once every three weeks

(approximately). Do not use the unit without the mesh air filter as this will allow dirt to gather inside the dehumidifier, which could invalidate the warranty.

A dirty filter will restrict the airflow into the machine, which will increase the resistance on the fan and could result in damage and might invalidate the warranty.

Since the filters remove airborne particles, more frequent cleaning may be necessary depending on the air quality. Vacuum and wash the mesh filters with hot soapy water and dry them before placing them back in the unit.

### QUICK VISUAL SAFETY GUIDE ON WHERE OR WHEN NOT TO USE YOUR DEHUMIDIFIER



Exposed to the weather outdoors



Near water



If the power cable wires are frayed or cut



Where small children may be left unattended



If an extension lead may become overloaded



Where it may be damaged by chemicals



Where the power cable may be damaged



Where there is a risk of interference by foreign objects



On a slope or uneven surface



This product is not for DIY repair



Where there is a risk of fire, or close to a naked flame



Where there is a risk of water falling on the unit

### **FEATURES:**

Your DESD9LW is a top of the range desiccant dehumidifier with features not found in other units.

- 1. Efficient, easy to use and quiet.
- 2. Intelligent CPU controlled digital humidistat with 4 modes (SMART, Heater, Dehumidifier and Air purifier),
- 3. Control and monitor the humidity or temperature remotely using your Android or Apple phone / tablet
- 4. Alexa and Google home compatible: use voice commands to conveniently operate the smart dehumidifier
- 5. Advanced scheduling abilities using the App
- 6. Relative humidity adjustable between 35-80% with room humidity display.

Above 70%: Too humid

70% ≥ RH ≥ 60%: Above recommended humidity.

60% ≥ RH ≥ 50%: Ideal humidity level.

Below 50%: Too dry

- 7. Turbo and Sleep modes designed to enable the right balance to be chosen between quiet operation and maximum dehumidification / heating.
- 8. Easy to use control panel with led indicators.
- 9. 6 stage air purifier, with nano-silver coated filter, active carbon filter, HEPA filter, Ionizer and UV light
- 10. Works very well at low temperatures compared with classic compressor dehumidifiers.
- 11. Standalone heater providing two levels of heat output with thermostatic control.
- 12. Laundry mode for aiding the drying of clothes.
- 13. Heats the air passing through by between 5-10°C, making the air dry and warm reducing heating bills.
- 14. Tank full alarm & auto-stop function.
- 15. Recessed carry handle for portability

The DESD9LW desiccant dehumidifiers uses compressor free desiccant technology to extract water from the environment. Desiccant dehumidifiers are ideal both at standard and low temperatures working in an ambient temperature range of between 1-32°C. The DESD9LW is light and easy to move, as it does not contain a heavy compressor. It also works intelligently as it is designed to extract unwanted humidity while saving money due to its advanced power saving logic.

It features an intelligent digital humidistat with variable humidity settings between 35-80% RH, ensuring your room is not dried too much, and power is not wasted. The DESD9LW also features a powerful laundry mode and a sleep mode giving the user the ability to select maximum dehumidification or quieter operation.


### **INSTALLATION**

Remove any water from the water tank before starting the unit. In order to save energy, do not open windows or doors while the unit is running. Place the unit on a hard / flat surface. We would advise the unit is left to run continuously for 24hrs on its first use.

### TO REDUCE NOISE LEVELS:


Place a piece of carpet or a rubber mat under the unit to reduce any vibrations while the unit is running. For minimum noise run the unit in sleep mode.

### **PARTS**

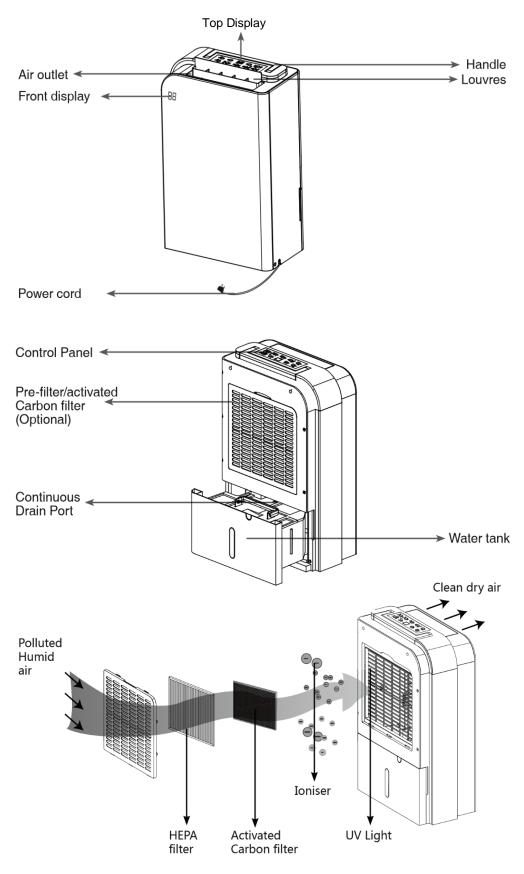


### **ACCESSORIES**

### **Activated carbon filter (Optional)**




### **HEPA FILTER** (Select configuration)



(OPTIONAL)

6 stage dual action dehumidifier and purifier great in improving indoor air quality

### **CONTROL PANEL**

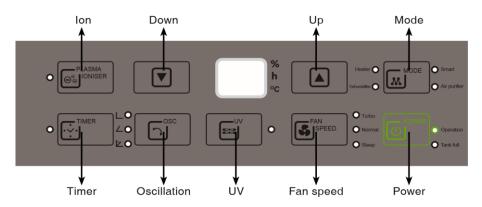



### **POWER BUTTON**

Turn the appliance ON/OFF. Please note following turning off the unit will take around 3 minutes to dry the zeolite disk before operation stops.

### MODE BUTTON

Change the mode between Smart, Heater, Dehumidifier and Air Purifier

**SMART MODE:** The unit will default to Smart mode the first time it is switched on and remains in this mode until another program is chosen. In Smart mode, the target humidity is set to 50% and the fan speed will be adjusted automatically. The target humidity cannot be changed in this mode



**HEATER MODE:** This allows the user to select the desired temperature for the room using the up and down buttons.

**DEHUMIDIFY MODE:** This allows the user to select the desired humidity for the room using the up and down buttons.

**AIR PURIFIER MODE:** This will help to improve the indoor air quality using the 6 stage purifier system. No water will be extracted in this mode.

|                       | EAN OPEED  |
|-----------------------|--|
| FAN<br>SPEED          | This allows the user to adjust the fan speed.  TURBO: High fan speed, maximum heating, provides maximum dehumidifying and heating performance (No heating when air purifier mode)  NORMAL: Middle fan speed, eco dehumidifying and heating modes (no heating when air purifier mode)  SLEEP: Low fan speed, eco dehumidifying and heating modes (no heating when air purifier mode)  |
| LO                    | OSC. (OSCILLATION FUNCTION) There are three different option for the outer louvre on the unit. It can be set at 45 or 90 degrees, or alternatively to swing. Set the louvre at a 45 degree angle or swing when drying clothes.   |
| <b></b>               | UV LIGHT (FOR AIR PURIFIER FUNCTION)  To activate the UV function press the UV button and the indicator light will illuminate. The UV light will destroy germs and bacteria, greatly improving the indoor air quality.   |
| PLASMA<br>O'S IONISER | PLASMA IONISER BUTTON (IONIZATION FUNCTION) To activate the ionizer press the Plasma Ioniser button. The LED to the right of the button will illuminate to show the mode is active. The ionizer can refresh the air while killing viruses, dust mites, mould and airborne allergens.   |
| ▼                     | HUMIDITY/TEMPERATURE SETTING BUTTONS In dehumidifying mode, press the up and down buttons to set the target humidity (35~80%, in 5% increments) When a relative humidity of 35% is selected, the dehumidifier will not stop until the water tank is full. Please note these buttons will not adjust the desired humidity in smart mode. In the heating mode, press the up and down keys to set the target temperature (16~30 °C, in 1 °C increments)   |
| TIMER                 | TIMER BUTTON When the button is pressed, the led to the left of the button will illuminate to show the mode has been activated. The timer can be turned off by pressing the timer button again. The indicator LED will then turn off. The Timer can be used in 2 different ways  DELAYED POWER-ON: With the unit in standby, activate the timer mode and use the "UP" and "DOWN" buttons to select in how many hours you require the unit to start.  DELAYED POWER-OFF: With the unit running in the chosen mode, press the timer button and use the "UP" and "DOWN" buttons to select in how many hours you require the unit to turn off. |
| o TANK<br>FULL        | TANK-FULL  If the water tank is full, the indicator light will flash, please empty the water tank to continue operation. The light will also illuminate if the tank is incorrectly fitted.   |
| OPERATION             | OPERATION The operation light will illuminate when the unit is running to extract moisture from the air. Please note this may not light up immediately when the unit is started and will go out when the desired humidity is reached.  |

### **HUMIDITY LEVEL & TIMER 2 DIGIT DISPLAY**

The led indicator performs the following functions:


WHEN THE UNIT IS PLUGGED IN: It will indicate the humidity level of the room. WHEN ONE OF THE HUMIDITY SETTING BUTTONS ARE PRESSED: It will indicate the desired humidity, before reverting to showing the current humidity after a few seconds.

WHEN THE TIMER BUTTON IS PRESSED: It will indicate how many hours the timer function will operate, before reverting to showing the current humidity after a few seconds

**Notes:** If the ambient humidity is lower than 20%, the display will show "LO". If the ambient humidity is above 90%, the display will show "HI". The dehumidifying function will be deactivated until the humidity has returned to within the normal range to prevent damage to the unit.


### CARBON FILTER (OPTIONAL)

Remove the carbon filter from the bag and insert it on the filter housing. It is suggested to hoover the carbon filter every 2-3 weeks and replace it every 3-6 months to keep the room fresh and odour free.

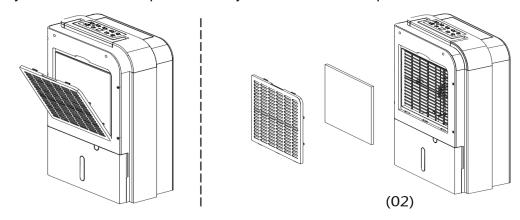

### **CLEAN THE GRILLE AND CASE**

Use water and a mild detergent to clean the washable mesh filters. Do not use bleach or abrasives. Do not splash water directly onto the main unit. Doing so may cause electric shock and can cause the insulation to deteriorate, or the unit to rust. The air intake and outlet grilles get soiled easily, so use a vacuum attachment or soft brush to clean. Wipe the dehumidifier body with a soft damp cloth or kitchen towel.



### **HEPA FILTER (OPTIONAL):**

According to the time and frequency of use, it is generally recommended to replace the HEPA filter after about 3 months. The HEPA filter cannot be washed.

### QUICK REFERENCE GUIDE



**POWER BUTTON:** Press the power button to turn the dehumidifier on and off.



SWING CONTROL BUTTON: Press once to make the louvres swing and press again to lock at 45 degrees, press again to lock at 90 degrees. Do not operate the unit if the self-opening louvers do not open when the unit is powered on.



**TIMER BUTTON:** Press the timer button before using the up and down buttons to adjust the duration of the timer (1-24 hrs, start / stop timer).

**IN POWER ON MODE:** The number displayed will represent the number of hours the unit will run for before turning off. This will remain unaffected if unit goes in to defrost mode or the tank is emptied then reinserted.

IN STANDBY MODE: The number displayed represents the period in hours after which the unit will start. To cancel the timer press the timer button again.

**MODE BUTTON:** Used to change between the 4 operating modes.

SMART MODE: In smart mode the target humidity is set to 50% and the dehumidifier will automatically determine the best fan speed and dehumidification rate according to the humidity of the room. The fan speed cannot be adjusted manually.

A: When the ambient humidity is >65%, the fan runs at high speed, and the dehumidifier runs at maximum performance;

**B:** When the ambient humidity is between 55% and 65%, the fan runs at normal speed, and the dehumidifier runs in eco mode.

C: When the ambient humidity is between 50% and 55%, the fan runs at low speed (Sleep), and the dehumidifier runs in eco mode.

**D:** When the ambient humidity is <50%, the fan runs at a low speed with no dehumidification and only circulates indoor air.

**HEATING MODE:** The unit will provide heating up to the desired room temperature, which can be selected using the up and down buttons, this can be adjusted between 16 - 30°C in 1°C increments. The control panel will display room temperature, with the front panel displaying the humidity of the room. While adjusting the temperature, both displays will flash the desired temperature set. Use the fan speed button to adjust the fan speed and level of heating (maximum or eco-mode).

**DEHUMIDIFIER MODE:** The unit will dehumidify until the required humidity level has been reached. This can be adjusted using the up and down buttons between 35 – 80% in 5% increments. The control panel will display current humidity of the room, and the front panel will display the room temperature. While adjusting the desired humidity, both displays will flash the desired humidity set. Use the fan speed button to adjust the fan speed and level of dehumidifying (maximum or ecomode).

AIR PURIFIER MODE: No moisture will be extracted in this mode, which, when used with filters, will purify the air. The UV and plasma ioniser can also be used in this mode to further improve the quality of air processed.

# WHEN THE APPLIANCE IS RUNNING IN HEATING, DEHUMIDIFYING OR SMART MODE:

- 1. If the unit works continuously more than 8 hours without reaching the desired setting it will go into standby for a period of 30 minutes. After the 30 minutes has elapsed, the unit will restart with the previously used settings.
- 2. When the room temperature or humidity reaches the desired level, the heating element will turn off. The fan will continue to work for 5 minutes before the unit enters standby mode. After a delay of 30 minutes, the fan will then restart for 5 minutes to recirculate and sample the air.

**HEATING MODE:** If the room temperature has dropped to at least 1°C below the desired level, the unit will restart operation.

**DEHUMIDIFYING MODES:** If the humidity of the room is at least 2% above the desired level set, the unit will restart operation.

If the conditions above are not met for the unit to restart operation, the appliance will re-enter standby mode for another 30 minutes.

When the power button is pressed, the heating element will turn off immediately, but the fan motor will continue to run for 5 minutes, in order to radiate the inner heat. In order to protect the machine do not remove the plug during the 5-minute power down process.

**LAUNDRY MODE:** When drying clothes the dehumidifier is required to operate continuously with maximum water extraction until the tank is full, set the fan to Turbo mode and set the desired humidity level to 35%-50% RH. 35% is very dry, and the unit will work until the water tank is full as 35%RH is unlikely to be achieved in a domestic environment. The louvres should be set to either swing mode or to 45 degrees directing the airflow onto clothes / laundry. Do not place clothes directly over the dehumidifier vents. Make sure that there are no obstructions to either the hot air exhaust or the air inlet, for best results place the laundry within 1.5 meters of the dehumidifier.

**Please Note:** If a permanent drainage pipe is fitted, the unit will not stop operation. Setting the desired humidity to around 35% is good for a drying boost, on the units initial run, or in emergencies. It is not recommended to use it with these settings for normal operation in a domestic or office environment over a long period of time, as the air may become uncomfortably dry.

For allowing more moisture in the air, press the humidity button to set to a higher percentage value (e.g. 60-70%).

50-55% RH - Recommended setting, great for domestic operation and dry storage.
60% RH - Great for personal comfort and applications where 50% RH is considered too dry.
70% RH - Ideal for unoccupied properties or where an economical run is needed without the need to go drier than 70% RH

### OTHER FEATURES AND INDICATORS

### **TANK FULL LIGHT**

The light will illuminate and the unit will beep when the tank is ready to be emptied, or if the water tank is incorrectly inserted. The water level control will shut off the dehumidifier until the tank has been emptied and replaced in its proper position.

### **AUTO-RESTART (ON SOME MODELS)**

If the unit stops unexpectedly due to a power cut, it will restart with the previous function selected when the power is reinstated.

### LIGHTWEIGHT PORTABLE DESIGN ON CASTORS

The dehumidifier is built to be compact and lightweight. The castors on the bottom of the unit makes it easy to move from room to room. Your dehumidifier is an advanced micro-CPU controlled device capable of self-diagnostics. The LCD display may also show error and protection codes.


### POSITIONING THE DEHUMIDIFIER

A badly positioned dehumidifier will have little effect. In positioning the dehumidifier please ensure circulation of the air is not restricted around the unit. At least 20 cm space should be allowed around the unit.

This dehumidifier is designed for indoor residential / small office applications only and any commercial or industrial use will invalidate the warranty.

Use the dehumidifier in an enclosed area for maximum efficiency. Close all external doors and windows to create an effective operating environment. Do not use outdoors.

Your electriQ dehumidifier will begin to protect your space from the harmful effects of excessive moisture as soon as it is turned on. Excess moisture is dispersed throughout your home. For this reason, the dehumidifier should be positioned in a central and clear location so that it can draw this moist air towards it. A warm hallway or landing is an ideal position for your dehumidifier. If possible, leave interior doors ajar to allow air circulation between rooms.



Alternatively, if you have a serious problem in one area you can begin by positioning the dehumidifier in that area and moving it to a more central location at a later date. Please note the unit should not be placed directly against a radiator or other heat source. When positioning your electriQ dehumidifier, ensure that it is placed clear of any obstacle that may limit the air movement, and ensure it is placed on a dry flat surface.

### WATER DRAINAGE

When the water tank is full, the unit will stop operating. When this happens, the TANK FULL light will show on the control panel, and the unit will bleep.

**Note:** Only empty the water tank when it is full or before moving or storing the unit. There are two ways to dispense collected water.

### **USE THE INTERNAL WATER TANK**

When the tank is full, the unit will stop running, and the TANK FULL indicator light will display. Grip the tank securely and carefully pull out. Empty the water tank and reinsert it into the dehumidifier. The tank must be in place and securely seated for the dehumidifier to operate again. The dehumidifier will re-start when the tank is restored to its correct position.


### **NOTES:**

- Do not remove the water tank immediately after the unit stops. Please wait a while to avoid the water dripping into the unit and causing damage.
- Only empty the water tank when it is full or before moving or storing the unit.
- Do not rest the tank on the floor because the bottom of the tank could be uneven and the tank may fall, causing water to spill.
- When you remove the tank, do not touch sensors or any parts which are situated behind the tank. Doing so may damage the product. Be sure to push the tank gently all the way into the unit. Banging the tank against anything or failing to push it securely into place may prevent the unit from operating.
- Do not remove or damage the float switch in the water tank, otherwise the machine will stop working.
- Please make sure the water tank cover is put back into place correctly before the water tank is reinserted.
- If the water tank is inserted incorrectly, the full tank indicator will illuminate. Remove the water tank and reinsert to turn the indicator off and resume normal use.
- At all times, avoid water entering the unit. It may cause an electrical hazard and damage the unit.

### SET UP CONTINUOUS DRAINAGE

The dehumidifier has a continuous drain hole that can be connected to a plastic pipe with a 15 mm inner diameter (Not Supplied). Water can be plumbed in or drained into a sink, a larger receptacle or through the wall into an outside drain. Please follow the steps below to set your unit up for continuous drainage.







- 1. Cut off the cover for the continuous drain on the back of the unit.
- 2. Pull out the water tank and connect a water tube with an inner diameter of 15mm to the drain connector, and ensure the connection is tight
- 3. Replace the water tank into position within the unit.

This unit uses gravity to dispose of the water collected and as such the drain should be lower than the dehumidifier water outlet. Be sure to run the water pipe downward and let the water flow out smoothly. Do not kink or bend the pipe.

**NOTE**: When the continuous drain feature is not being used, remove the pipe installation, to start the water collecting in the water tank. The permanent drain can be used in conjunction with a water pump (e.g. when draining from a cellar) to lift the water upwards.

### **SETTING UP THE WIFI APP**

### **BEFORE YOU START**

- Ensure your router provides a standard 2.4ghz connection.
- If your router is dual-band ensure that both networks have different network names (SSID). The provider of your router / Internet service provider will be able to provide advice specific to your router.
- Place the dehumidifier as close as possible to the router during setup.
- Once the app has been installed on your phone, turn off the data connection, and ensure your phone is connected to your router via WiFi.

### DOWNLOAD THE APP TO YOUR PHONE

Download the "TUYA SMART" app, from your chosen app store, using the QR codes below, or by searching for the app in your chosen store.



**Android** 



IOS

### **CONNECTION METHODS AVAILABLE FOR SETUP**

The smart device has two different setup modes, CF (Quick Connection) and AP (Access Point). The quick connection is a quick and simple way to set the unit up. AP connection uses a direct local wifi connection between your phone and the dehumidifier to upload the network details.

Before starting the setup, please ensure that your dehumidifier is in the correct standby mode for the connection type you are attempting, the display your dehumidifier will indicate this.

To connect to the WIFI, press and hold the mode button when the unit is in stanby mode until 3 beeps are heard.


### CHANGING BETWEEN CONNECTION MODES / WIFI RESET

To change the unit between the two connection types, hold the MODE button for 3 seconds. The connection mode is signified by the frequency of the flashing Smart light. This will also remove any previous WIFI configuration.

| Connection Type       | Frequency of Flashes     |
|-----------------------|--------------------------|
| CF (Quick Connection) | Flashes twice per second |
| AP (Access Point)     | Flashes once per second  |

### **REGISTER THE APP**

1. Press on the register button at the bottom of the screen.

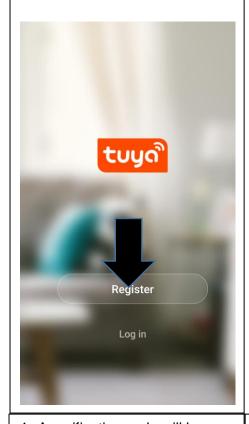

- 2. Read the Privacy policy and press the Agree Button.
- ← Privacy Policy

### Privacy Policy of Tuya Smart Platform

Update date: 2018.4 Come into force date: 2018.5

So you have purchased our TuyaSmart device hardware and are starting to use the TuyaSmart device software and all its functionalities! Any information you share with us (e.g. for creating a Tuya Account) will help us to provide you with services related to TuyaSmart device and to improve them to make them even better. We explain here our ways of collecting and using information, and how we protect your privacy. In this policy, "personal data" means infor that can be used to identify an indice either from that information alone, that information and other informs.

Disagree Agree


3. Enter your email address or phone number and press continue to register.

Register

United Kingdom +44

Mobile number/Email

Continue



4. A verification code will be sent by the method selected in step 3. Enter the code into the app.

 $\leftarrow$ 

### **Verification Code**

Verification code has been sent to:

Resend(57s)


1 2 3 -4 5 6 , 7 8 9 \square 5. Type in the password you would like to create. This needs to be 6-20 characters, with letters and numbers.

 $\leftarrow$ 


### **Set Password**

Password must contain 6-20 letters and numbers

Done




2. The app is now registered. It will automatically log you in following registration.

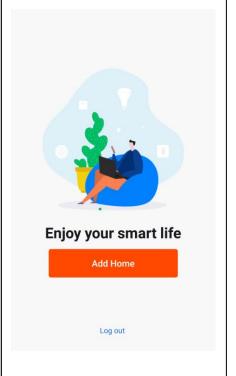


### SETTING UP YOUR HOME WITHIN THE APP

TUYA is designed so it can work with a large number of compatible smart devices within your home. It can also be set up to work with multiple devices within different houses. As such, during the setup process the app requires that different areas are created and named to allow easy management of all your devices. When devices are then added, they are assigned to one of the rooms you have created.

### **CREATING ROOMS**

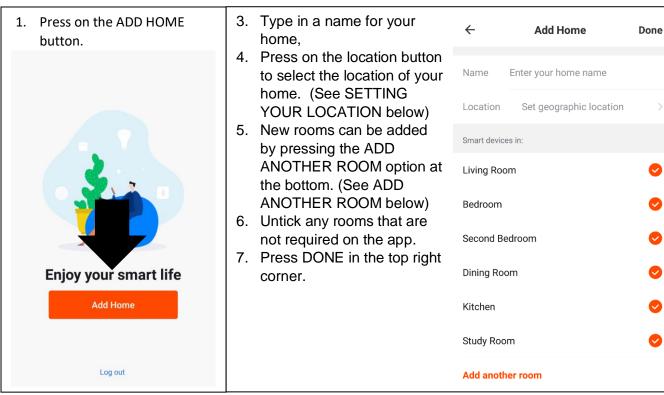


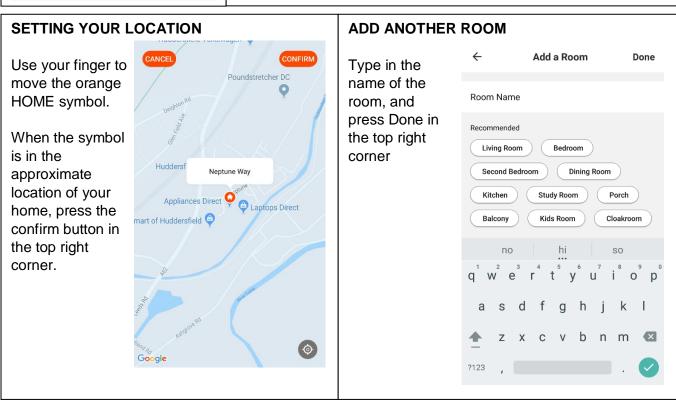


### **CONNECTING USING QUICK CONNECTION**

Before initiating the connection, make sure the unit is in standby mode, with the WIFI light flashing twice per second. If not, follow the instructions for changing the connection mode. Ensure your phone is connected to the WiFi network. (We advise turning mobile data off during setup)


 Open app and press "+" to add device, or use the add device button




Select the type of device as "Dehumidifier"in the Small Home Appliance tab.




 Ensure the WiFi light on the dehumidifier is flashing twice per second, then press on the orange button at the bottom of the screen to confirm.



4. Enter your WiFi password and press confirm.





5. This will then transfer the settings to the dehumidifier. Wait for this to complete. If this fails, retry. If still unsuccessful please review the troubleshooting section for further help.




### **CONNECTING USING AP MODE (ALTERNATIVE METHOD)**

Before initiating the connection, make sure the unit is in standby mode, with the WiFi light flashing once per second. If not, follow the instructions for changing the connection type. Ensure your phone is connected to the WiFi network. (We advise turning mobile data off during setup)







2. Select the type of device as "Dehumidifier"




3. Press on the AP mode button in the top right of the screen.



4. Ensure the WiFi light on the dehumidifier is slowly flashing (once per second), then press on the orange button at the bottom of the screen to confirm



5. Enter your WiFi password and press confirm.



6. Go to network settings in your phone and connect to the "SmartLife xxx" connection.

There is no password to enter. Then return back to the app to complete setup.




This will then transfer the settings to the dehumidifier.

Once the connection process has completed, go back to the network settings on your phone to ensure your phone has reconnected to your WiFi router.

### **CONTROLLING YOUR DEVICE THROUGH THE APP**

### THE HOME SCREEN

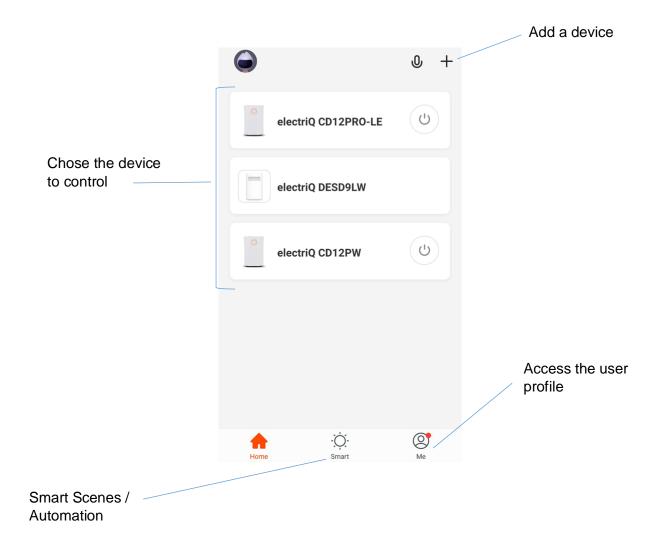


### **DEVICE SCREEN**



### **DEVICE SCREEN**

The device screen is the main control screen for the dehumidifier, providing access to the controls to amend the functions of the dehumidifier

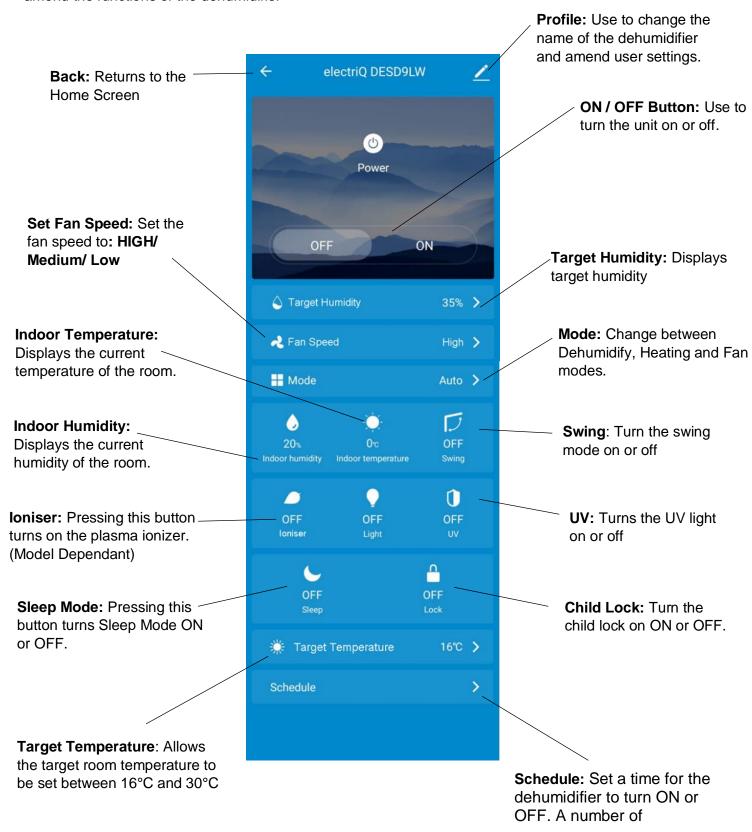

### **SMART SCENES**


Smart Scenes is a powerful tool providing the option to customise the operation of the dehumidifier based both on conditions within the room and outside influences. This gives the user the option of specifying much more intelligent actions. These are split into two categories Scene and Automation.

### **SCENE**

Scene allows for a one-touch button to be added to the Home screen. The button can be used to change a number of settings in one go and can change all the settings within the unit. A number of scenes can easily be set up, allowing the user to easily change between a number of preset configurations.

Below is an example of how to set up a scene:


 Press on the Smart Scene tab at the bottom of the Home screen




2. Press on the Plus in the top right corner to add a smart scene.



Select Scene to create a new Scene






4. Press the Pen next to "Please Enter Scene Name" to input the name for your Scene

Show on Dashboard: Leave this on if you require the scene to be displayed as a button on the Home Screen

Press the Red Plus to add the action required. Then select the dehumidifier from the list of devices.

5. Chose the function, set the value for the function, and then press the back button in the top right corner, to return to the previous screen.




6. Once all the functions required have been added, press the Save button in the top right corner to finalise and save your new Scene

### **AUTOMATION**

 $\leftarrow$ 

Automation allows an automatic action to be set up for the device. This can be triggered by the Time, indoor temperature, humidity of the room, weather conditions, and a range of other influences.

 Press on the Smart Scene tab at the bottom of the Home screen



**Smart Setting** 

Please Enter Scene Name 🗹

When any condition is satisfied >

**Execute following actions** 


When the following conditions are met

Add a execution action.


Save

M

2. Press on the Plus in the top right corner to add a smart scene.



3. Select Automation to create a new Automation Scene




4. Setup is very similar to the scene setup on the previous page, and includes an extra section for specifying a trigger for the scene to start.

Press the Pen next to "Please Enter Scene Name" to input the name for your Scene


Press the Red Plus next to "When any condition is satisfied" to add the trigger

Press the Red Plus next to "Execute following actions" to add the action required. Then select the

5. Select the condition when the automation should start. A number of triggers can be combined.




6. Chose the function, set the value for the function, and then press the back button in the top right corner, to return to the previous screen.



7. Once all the functions required have been added, press the Save button in the top right corner to finalise and save your new scene.

The automation is now set up, it can be turned on and off using the toggle on the image shown on step 2.

### **DEVICE DETAILS SCREEN**

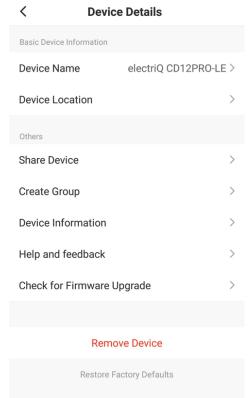

The device details screen gives you the option to edit the details for the devicel, and use some of its additional features. The device details screen can be accessed from the device screen by pressing on the symbol in the top right hand corner.

### CHANGING THE NAME OF YOUR DEVICE

The top option within this allows you to change the name of the device to something relevant to the use of the product, such as "Living Room Dehumidifier". Within the menu, you also have the option of setting up a pattern lock or change your password.

### **DEVICE SHARING**

This allows you to share access to the controls of your dehumidifier with friends and family.

### **PROFILE TAB**

The Profile tab allows you to make changes to the app, such as setting up a username and editing or adding rooms.

Within the Profile tab, you are also able to change settings related to the app itself.

# Tap to Set Username ☐ Family Management ☐ Message Center ☐ Help Center ☐ More Services ☐ Settings ☐ Message Center

 $\Xi$ 

### **CONNECTION TROUBLESHOOTING**

- 1. Check whether the device is powered on and is in the correct standby mode, if not please refer to the CHANGING BETWEEN CONNECTION MODES section on page 12.
- 2. Ensure the wifi password has been entered into the app correctly (Case sensitive)
- 3. Check that the phone is connected to the wifi you are connecting the device to.
- 4. Ensure the network you are connecting it to is 2.4Ghz (5Ghz wifi networks are not supported), and that there is a strong wifi signal to the item.
- If your router is dual band, ensure that the 2.4ghz network has a different network name (SSID). Further
  advice on changing router settings will be available from your Internet service provider / Router
  manufacturer.
- Check the settings on the router. Encryption should be WPA2-PSK and authorisation type should be set to AES
- 7. Try using the alternative connection method. i.e. If connection is failing when attempting to connect through CF mode, try AP mode.

### **CARE AND MAINTENANCE**

Always shut off the unit and unplug it from the mains before cleaning or performing any maintenance. When it is not in use for long periods, it is advisable to remove the plug from the power socket. Do not use chemical solvents (such as benzene, alcohol or gasoline) as they may cause irreversible damage to the unit.

### **FILTER CLEANING**

The Air-inlet may gather dust easily, clean it often with a soft, damp cloth. If the filter is covered by dust, the airflow and the performance of the unit will be affected. It may even cause damage to the unit. We recommend that you regularly clean the filters. The dehumidifier must be disconnected from the socket before maintenance, and the filters must be allowed to fully dry before use.

- 1. Remove the filters from the unit, and tap the dust away.
- 2. Clean the Carbon (Optional) and the mesh filter with a vacuum cleaner or a soft brush.
- 3. If dirt and grease have accumulated, wash the mesh filter in hot soapy water.
- 4. Replace the filters in position.

**NOTE:** Never use the unit without the antibacterial mesh dust filter. The active carbon filter is optional and should be replaced if necessary after 1-1 ½ years of usage.

### **HEPA FILTER (OPTIONAL):**

According to the time and frequency of use, it is generally recommended to replace the HEPA filter after about 3 months. The HEPA filter cannot be washed.

### **CLEAN THE WATER TANK**

Every few weeks, clean the tank to prevent the growth of mould, mildew and bacteria. Partially fill the tank with clean water and add a little mild detergent. Swish it around before emptying the tank and rinsing.

NOTE: Do not use a dishwasher to clean the tank. After cleaning and drying the tank must be reinserted securely into the dehumidifier in order to restart operation.

### **END OF SEASON MAINTENANCE**

- 1. Empty and clean the water tank.
- 2. Clean the unit and the filters as per the cleaning procedure above.
- 3. Coil the power cord on the special cord storage rest at the back of the unit.
- 4. Cover the unit and keep it in a dry place.

### POWER CORD MAINTENANCE AND REPLACEMENT

If the power cord is damaged, it could cause a short circuit or become a fire risk. Please avoid pulling the cord, twisting or pressing it and keep it away from pets. If the power cord is damaged, power the unit off and unplug it immediately. Contact an electrician or service centre for repairs; do not attempt to repair the unit yourself.

## **TROUBLESHOOTING**

| Problem  | Possible Cause  | Solution   |
|--|---|--|
|  | Power is abnormal   | Contact an electrician to perform a repair.  |
| The unit does not work   | Water tank displaced or full  | Check water tank placement or empty water tank   |
|  | Room temperature is too high, or air-outlet is covered  | Lower room temperature, clear air outlet   |
|  | Filter is dirty   | Clean the filter   |
| Poor performance   | Door & windows are open   | Close door & windows   |
|  | Air-inlet or out-let is blocked.  | Clean air-inlet & air-outlet   |
| Too Noisy  | Unit is not placed on even surface.   | Place the machine on the flat surface. Add carpet or rubber mat underneath   |
|  | Filter is blocked   | Clean the filter   |
| The device does not dehumidify   | The relative humidity in the room where the dehumidifier is operating is too low.   | The dehumidifier dries down to the target relative humidity set and will then go into standby if the desired humidity has been reached.      |
|  | The place is too large. This dehumidifier can dry up to about a small five-bedroom house.   | We recommend using a dehumidifier with a greater capacity. Call customer service line for advice.  |
| The dehumidifier works, but relative humidity is still high  | There are too many sources of moisture. Bathing, washing, drying clothes and cooking all put moisture into the air.   | We recommend using a dehumidifier with a greater capacity.   |
|  | Paraffin or Calor gas<br>heating can add too<br>much moisture into the<br>air   | Consider using alternative heat sources  |
| The windows were clear, and now condensation has returned.   | The outside air temperature has dropped significantly, and the windows are colder.  | Set the dehumidifier to 40%RH and run for longer   |
| I cannot<br>remove the<br>condensation<br>from my<br>windows,<br>even in<br>"Continuous"<br>or "Laundry"<br>mode | The surface temperature of the windows is too low for a dehumidifier to prevent condensation. Common with single glazed windows or poorly insulated houses when the outside air temperature drops below 0°C | Keep running the dehumidifier on "Laundry" 24 hours a day and if the air temperature outside increases the condensation on windows may clear |
| The dehumidifier is blowing out warm air   | The dried air is passed over a heating element before it is blown into the room as part of the dehumidification process   | This is normal and helpful, especially in the cold weather; a dehumidifier is not an air cooler.   |
| Knocking<br>noise coming<br>from the<br>dehumidifier   | The motor wheel is low on lubrication or dirt may have entered the motor ball bearings  | Run the dehumidifier in Laundry mode for two days to increase the lubrication, if the fault persists then call the service centre            |

| Water not<br>draining<br>down the<br>hose  | The hose is fitted for continuous drainage, but the water still goes into the tank                                 | Negative air pressure in the room is pulling the water back into the dehumidifier overflow.  Insert a 3 mm hole into the top of the tube 25 mm down from the spout. This will introduce air into the tube and balance out the air pressure.  Dirt is gathered in the internal tray. May need servicing.  If the fault persists then call the service centre |
|--|--|---|
| Dehumidifier leaks water onto the floor  Usually means that the dehumidifier is not on a level surface or that the filter has not been cleaned often enough and dirt has fallen into the internal tray dehumidifier. | dehumidifier is not on a   | Check that the water bucket is not cracked by filling it with water and placing it on kitchen paper on the kitchen side.  |
|  | Check if filters are clean   |   |
|  | cleaned often enough<br>and dirt has fallen into<br>the internal tray  | If the fault persists then call the service centre  |
| Machine not switching off the heater when desired humidity is reached  Temperature and relative humidity sensor that reads the room reading is unable to read the correct readings                                   | Clean the filter and blow the air sensor with a hover or hairdryer on the COLD setting to clear the sensor of dirt |   |
|  | Unplug the dehumidifier for 10 minutes to reset PCB and then turn back on.   |   |
|  |  | If the fault persists then call the service centre  |
| On pressing power off fan still works for around minutes and switches off  | Unit is drying/cooling internally before going in off mode   | Normal operation. DO NOT remove power until this has finished.  |

Note: when the fault cannot be solved by the solutions above, please contact the service centre for help, do not attempt repairs.

### FREQUENTLY ASKED QUESTIONS

### WHY DOESN'T THE UNIT WORK /OR STOPS SUDDENLY?

The water tank may be full or displaced. Empty the tank and carefully replace in the unit to rectify.

### WHY DOES IT REQUIRE EMPTYING VERY REGULARLY?

When you first use your dehumidifier, it will work harder to reduce the room humidity down to 50%RH (SMART mode or the desired humidity set in dehumidifier mode). This is the time when it will produce the most water and as such will require emptying most frequently (even 2-3 times /day). As the room becomes dryer, the dehumidifier will collect less water and it will take longer to fill the tank, this is perfectly normal. When the target relative humidity has been reached the dehumidifier will stop collecting water and will operate for longer periods in fan-only mode, this is normal operation. The intelligent logic of your machine will save you money.

### WHAT DESIRED HUMIDITY SHOULD I SET THE DEHUMIDIFIER TO?

Unless you are using the unit to dry clothes, we recommend setting the desired humidity to between 50 and 60%.

For unoccupied properties, garages and etc, set the unit 60-70%RH with the fan in normal or sleep mode according to your needs. That will ensure minimum power consumption while preventing moisture-related issues.

THE ROOM HAS REACHED THE DESIRED HUMIDITY, BUT STILL HAVING PROBLEMS WITH CONDENSATION If you find that you still have condensation on your windows or you need to dry the air further, set the unit to 40%RH or continuous mode with the fan set to turbo mode. This may be necessary if you have single glazed windows, the house is poorly insulated or if the outside air temperature drops towards freezing. Using the unit in turbo mode will add more heat to your room and reduce your heating bill as dry air will heat quicker

### electriQ UK SUPPORT

For your own convenience, make these simple checks before calling the service line.

- 1. Has the unit been standing upright? (for at least 2 hrs)
- 2. Is the unit plugged into the mains? Is the fuse OK?
- 3. Switch the unit on and wait three minutes to see if the issue is resolved.
- 4. Check whether the water tank is full.
- 5. Have you followed the troubleshooting procedures?

If the unit still fails to operate call: 0330 390 3061 or fill in the online form

Office hours: 9AM - 5PM Monday to Friday

www.electriQ.co.uk Unit J6, Lowfields Business Park Lowfields Way, Elland West Yorkshire, HX5 9DA

### **DECLARATION OF CONFORMITY**

Hereby, electriQ declares that this Portable air conditioner is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

https://www.electriQ.co.uk/content/declaration-of-conformity

### **TECHNICAL DATA**

| Model No.   | DESD9LW               |  |
|---|-----------------------|--|
| Rated Voltage   | 220-240V ~ 50Hz       |  |
| Dehumidify Capacity   | 10 L/Day (20°C RH60%) |  |
| Max Rated Input Power   | 755 W                 |  |
| Tank Capacity   | 6.5 litres            |  |
| Air Volume  | 190 m³/h              |  |
| Noise level   | 40 dB(A)              |  |
| Net Weight  | 9.1 kg                |  |
| All information provided is for reference only. Products specifications may change due to continuous product development. |                       |  |

Disposal: Do not dispose of this product as unsorted waste. Collection of such waste must be handled separately as special treatment is necessary.



Recycling facilities are now available for all customers at which you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating sites run by their local councils. Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please contact the local council for details of your local household waste recycling centre