
electric

USER MANUAL

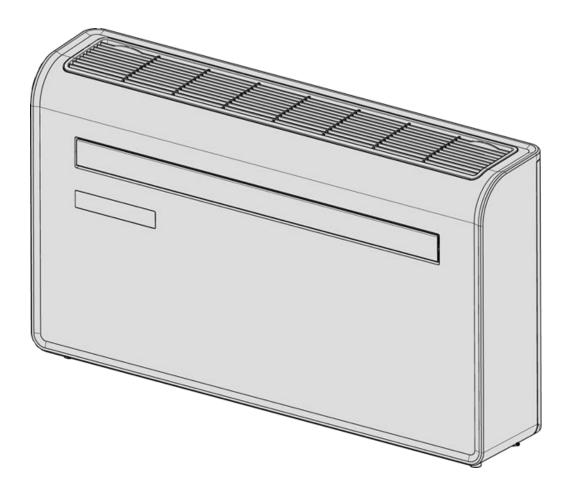

electriQ WALL MOUNTED AIR CONDITIONER WITH HEAT PUMP AND WIFI SMART APP IQOOL-SMART12HP

Thank you for choosing electriQ

Please read this user manual before using this innovative Air Conditioner and keep it safe for future reference.

Visit our page www.electriQ.co.uk for our entire range of Intelligent Electricals

CONTENTS

SAFETY INSTRUCTIONS	2
PRODUCT OVERVIEW	4
PRODUCT DIAGRAM	4
FEATURES	5
WHATS INCLUDED	5
INSTALLATION	6
TOOLS REQUIRED	6
INSTALLATION	7
OPERATION	10
CONTROL PANEL	10
REMOTE CONTROL	10
FUNCTIONS	10
WIFI SETUP AND SMART FEATURES	12
SETUP	12
CONTROLLING YOUR DEVICE THROUGH THE APP	17
SMART SCENES / AUTOMATION	19
TROUBLESHOOTING	22
TROUBLESHOOTING	22
ERROR CODES	23
TECHNICAL DATA	24
UK SUPPORT	25

SAFETY INSTRUCTIONS

IMPORTANT! AIR CONDITIONERS MUST ALWAYS BE STORED AND TRANSPORTED UPRIGHT, OTHERWISE IRREPARABLE DAMAGE MAY BE CAUSED TO THE COMPRESSOR; IF IN DOUBT WE SUGGEST WAITING AT LEAST 24 HOURS FOLLOWING INSTALLTION BEFORE STARTING THE UNIT.



- Carefully read the instructions before installing and/or operating the unit
- This appliance is for indoor use only.
- This unit must be only connected to a 220-240 V / 50 Hz earthed outlet.
- Installation must be in accordance with regulations of the country where the unit is used.
- If you are in any doubt about the suitability of your electrical supply have it checked and, if necessary, modified by a qualified electrician.
- This air conditioner has been tested and is safe to use. However, as with any electrical appliance use it with care.
- Disconnect the power from the appliance before dismantling, assembling or cleaning.
- Avoid touching any moving parts of the appliance.
- Never insert fingers, pencils or any other objects though the guard.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities. It is also not intended for use by those with a lack of experience and knowledge, unless they have been given supervision or instruction concerning the use of the appliance by a person responsible for their safety.
- Do not leave children unsupervised with this appliance.
- Do not clean the unit by spraying it or immersing it in water.
- Never connect the unit to an electrical outlet using an extension cord. If an outlet is not available, one should be installed by a qualified electrician.
- Do not operate the unit unless it has been fully installed following the guidance provided within this manual.
- Never operate this appliance if the cord or plug is damaged. Ensure the power cord is not stretched or exposed to sharp objects/edges.
- A damaged supply cord should be replaced by the manufacturer or a qualified electrician in order to avoid a hazard.
- Any service other than regular cleaning or filter replacement should be performed by an authorised service representative. Failure to comply could result in a voided warranty.
- Do not use the appliance for any purpose other than its intended use.
- Avoid restarting the air conditioner unless 3 minutes have passed since being turned off. This prevents damage to the compressor.
- Never use the mains plug as a switch to start and turn off the air conditioner. Use the provided ON/OFF button located on the control panel.
- The appliance should not be installed in laundry or wet rooms.
- The appliance must be installed in a room without sources of ignition (for example: open

flames, an operating gas appliance or an operating electric heater).

- The unit must be installed on a solid vertical wall by a competent person. The electricity supply must only be connected after installation is complete.
- R290 refrigerant gas complies with European environmental directives.
- R290 has a low GWP (Global Warming Potential) of 3.
- The air conditioner contains about 260 g of R290 refrigerant gas.
- Do not install or store in an unventilated space with an area smaller than 12.5m² per unit. The room must be such as to prevent stagnation of possible leaks of refrigerant gas as there could be a danger of fire or explosion hazard should the refrigerant come into contact with electric heaters, stoves or other sources of ignition.
- If the appliance is installed, used or stored in an unventilated room, the room must be such as to prevent stagnation of possible leaks of refrigerant gas as there could be a danger of fire or explosion should the refrigerant come into contact with electric heaters, stoves or other sources of ignition.
- Refrigerant gas may be odourless.
- Do not use the product and contact the retailer for advice, if damage has occurred to the unit which may have compromised the refrigerant system.
- Any repairs or maintenance must only be carried out on the unit by a suitably qualified engineer. Before opening and servicing the unit the authorized engineer must be in possession of a copy of the manufacturer's service manual and must follow the safety information contained within it to ensure all hazards are minimized.
- The refrigerant system should not be perforated or punctured.

Energy Saving and Unit Safety Protection Tips


- Do not cover or restrict the airflow from the outlet or inlet grills.
- Keep the filters clean. Under normal conditions, filters should only need cleaning once every three weeks (approximately). Since the filters remove airborne particles, more frequent cleaning maybe necessary, depending on the air quality.
- For the initial start-up set the fan speed to maximum and the thermostat to 4-5 degrees lower than the current temperature. After, set the fan switch to low and set the thermostat to your desired setting.
- To protect the unit, we recommend not using the cool mode when the ambient temperature is higher than 35°C.

NOTE: Some pictures and information may vary from the final product. This is due to continual product improvement.

PRODUCT OVERVIEW

PRODUCT DIAGRAM


FRONT

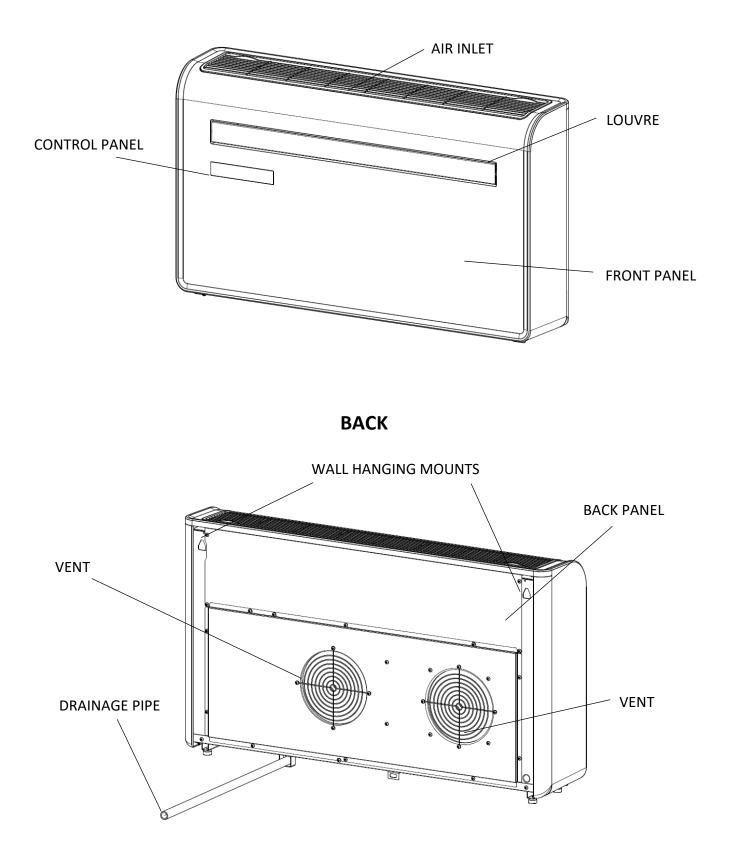

FEATURES

- Simple operation
- · High and low installation options for added versatility
- Self-evaporative function with energy saving technology
- Sleek design that seamlessly fits into any style home
- Bright LED screen Indicates temperature and current mode
- On/Off timer function Allows you to choose when the unit operates
- WIFI App control providing additional functionality
- Three fan speeds
- Four modes to suit your every need including: Cooling/Heating/Fan/Dry.
- Silent running option, perfect for a restful night sleep


WHATS INCLUDED

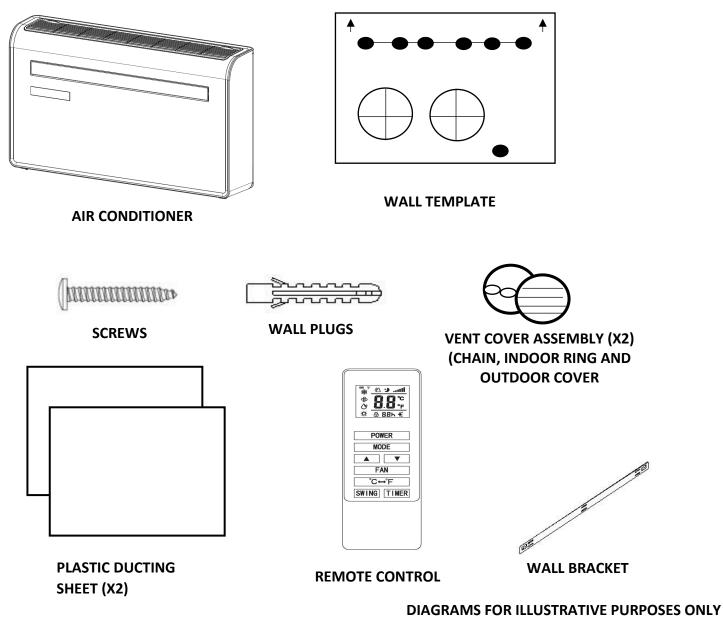

WIRED CONTROLLER AVAILABLE SEPERATELY FROM THE RETAILER UNDER REFERENCE: IQOOLSMART12HP-WiredCtrl

INSTALLATION


TOOLS REQUIRED

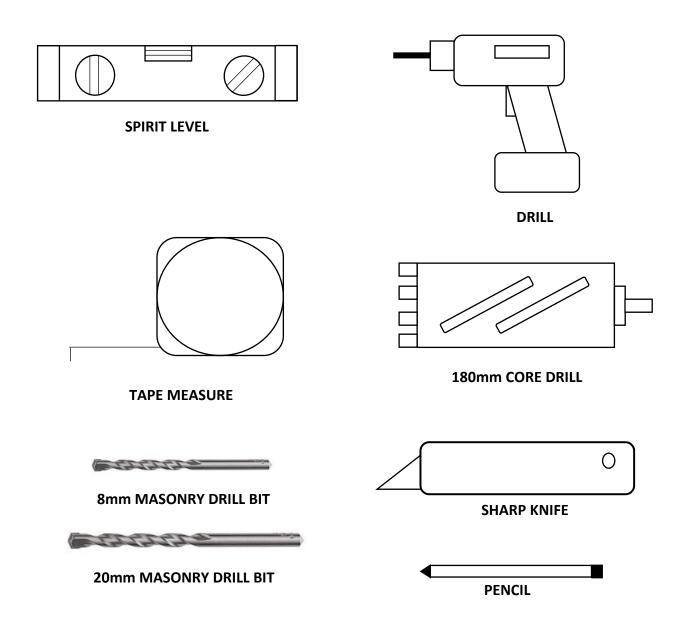

BEFORE STARTING INSTALLATION, PLEASE ENSURE YOU HAVE ALL SUITABLE EQUIPMENT AVAILABLE AND UNDERSTAND THE STEPS INVOLVED IN INSTALLATION. IF IN ANY DOUBT, PROFESSIONAL ADVICE SHOULD BE SOUGHT.

THE INSTALLER MUST ENSURE THAT THE PLANNED POSITION OF THE AIR CONDITIONER IS SUITABLE, AND THAT THERE ARE NO CABLES, PIPES OR OTHER OBSTRUCTIONS, WHICH WOULD PRESENT A DANGER AND/OR PREVENT COMPLETION OF INSTALLATION.


INSTALLATION




This unit must be installed on an external wall, as it vents directly out of its rear.

Only install the unit on a flat, solid and reliable wall. Ensure that there are no cables, pipes, steel bars or other obstructions behind the wall.

Leave at least 10 cm of space to the left, right and base of the machine. At least 20cm of space must be left above the unit to help air flow smoothly.



Paste the supplied installation template paper in position on the wall, ensuring that the reference line is level using a spirit level.




The hole for the drainage pipe must be drilled using a 20mm Drill bit. Ensure the hole is at a downward angle (min 5 degrees) so that the water will drain correctly

Use a 180mm core drill to drill the two holes for the units ventillation, ensuring that both the holes are aligned with the template.


Use the template to mark the position of the screws for the hanging rail, using a spirit level to ensure it is straight and level.


Drill the marked holes using a suitable 8mm drill bit and insert wall plugs. Line the hanging rail with the holes, and fix the rail into position using the supplied screws.

Ensure that the hanging rail is securely fastened onto the wall, and that there is no risk of the unit tipping or falling.




Roll the plastic vent sheets into a tube and feed them from the inside into the holes previously made. Ensure the tubes sit flush to the interior wall.




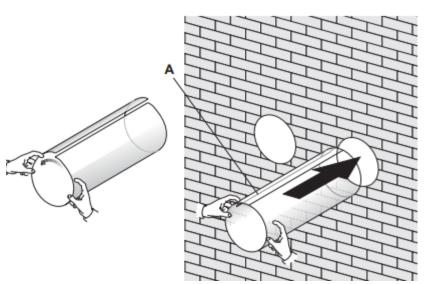


Go outside and trim off the excess vent tube using a sharp knife, keeping the edge as neat as possible.


Insert the indoor fixing ring from the vent cover onto the indoor side of the air vent. Then fold the external vent cover in half. Attach the chains to each side of the vent cover, before sliding the cover outside through the vent hole.








Expand the external cover, before tightly fixing the chains by hooking onto the indoor fixing ring. This will hold the external cover firmly in position. Repeat for the second vent.




Once the chains are fitted and secure, any excess chain should be removed by cutting the chain.



Lift the unit onto the wall, align the hanging holes with the hooks on the hanging rail and gently rest the unit into place. At the same time, slide the drain pipe through the drainage hole. If the wireless controller (Available separately) has been purchased, it should then be installed, and connected.

NOTE: The end of the external water pipe must be placed in an open space or drain. Avoid damage or constriction to the drainage pipe to ensure the unit drains.

OPERATION CONTROL PANEL

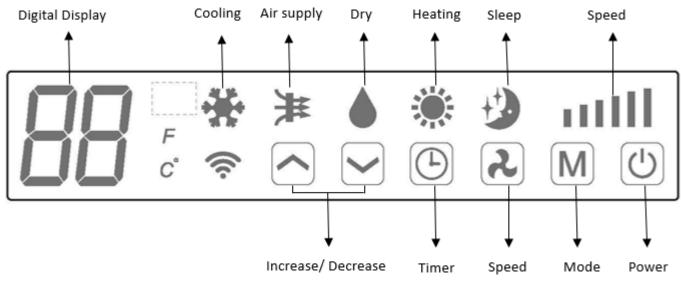


REMOTE CONTROL

The air conditioner can be controlled with the remote control. Two AAA-batteries are required.

NOTE: Further details of the functions can be found on the following page.

POWER	Press the POWER button to turn the machine on or off.	
TIMER	Press the TIMER button to set the timer.	
▼	Press the DOWN button to decrease the desired temperature or timer duration	
MODE	Press the MODE button to switch between cooling, heating, fan and dry modes.	
	Press the UP button to increase the desired temperature or timer duration	
FAN	Press the FAN button to change between high, medium and low fan speeds	
SLEEP MODE	Press the SLEEP button to turn on sleep mode (Can only be activated from the remote)	
SWING	Press to turn the swing function on and off (Can only be activated from the remote)	
°C 🛶 °F	Press to switch between displaying the temperature in farenheit and celcius.	

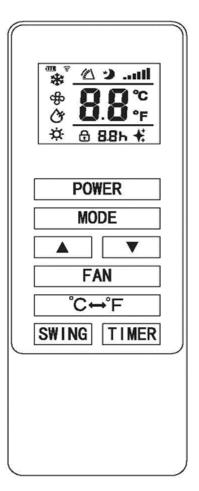

FUNCTIONS

POWER	Press "POWER" to turn the unit On or Off		
	Press to change between the 4 different modes. The display will show the symbol for the mode currently selected.		
The desired temperature can be adjusted using the increbetween 16°C and 30°C. The fan speed can also be adjusted using the increbetween 16°C and 30°C. The fan speed can also be adjusted using the increbetween 16°C and 30°C. The fan speed can also be adjusted using the increbetween 16°C and 30°C. The fan speed can also be adjusted using the increbetween 16°C and 30°C. The fan speed can also be adjusted using the increbetween 16°C and 30°C. The fan speed can also be adjusted using the increbetween 16°C and 30°C. The fan speed can also be adjusted using the increbetween 16°C and 30°C. The fan speed can also be adjusted using the increbetween 16°C and 30°C. The fan speed can also be adjusted using the increbetween 16°C and 30°C. The fan speed can also be adjusted using the increbetween 16°C and 30°C. The fan speed can also be adjusted using the increbetween 16°C and 30°C. Dry mode will extract moisture from the air, which will be		Cooling mode defaults to 22°C and will cool the air while sending warm air outside. The desired temperature can be adjusted using the increase and decrease button between 16°C and 30°C. The fan speed can also be adjusted using the speed button.	
		Dry mode will extract moisture from the air, which will be drained outside using the installed drain pipe. The fan speed cannot be adjusted in dry mode.	
MODE	FAN	In fan mode the appliance will recirculate the air within the room, and will not cool or dehumidify. The fan speed can be adjusted using the Speed button.	
The desired temperature can be adjusted using the incre		Heating mode defaults to 24°C and will heat the air while sending cool air outside. The desired temperature can be adjusted using the increase and decrease button between 16°C and 30°C. The fan speed can also be adjusted using the speed button.	
	SLEEP	Sleep mode can only be activated from the control panel by pressing the timer and up buttons at the same time. It will only operate in cooling or heating modes. In cooling mode, the fan speed will change to low, and the desired room temperature will increase by 1°C after 1 hour, and a second 1°C after 2 hours, reducing the amount of time the compressor operates. In heating mode it works exactly the same, but the desired temperature is decreased.	
FAN SPEED	attt	Press to change the fan speed between Low, Medium and High. The fan speed cannot be adjusted in Dry or Sleep modes.	
	The air conditioner contains a 24 hour timer, which can be used to either set a delayed start, or a set period of operation. The timers cannot be combined, although the app can be used to program periods of operation. SHUTDOWN TIMER: While the unit is running press the timer button, the display will flash "0" 5 times. After the 5 th flash, use the up and down buttons to adjust the duration in 1 hout		
TIMER	TIMERincrements between 1 to 24 hours. When the timer has elapsed, the unit will shutdown automatically.DELAYED START TIMER: With the unit in standby, press the timer button, the display will flash "0" 5 times. After the 5 th flash, use the up and down buttons to adjust the duration in 1 hout increments between 1 and 24 hours. After the timer has elapsed, the unit will start up in the same mode with the same settings as when it was turned off.		
INCREASE AND DECREASE	Used within cooling and heating modes to adjust the desired room temperature. Also used while setting the timer to adjust the duration.		
SWING MODE	After machine turns on, press the "SWING" button, louver will swing continuously up and down; by pressing the button again the movement will stop and the louver remain in that position. Swing mode can only be adjusted from the remote, and will initially be turned on by default.		
COMPRESSOR PROTECTION	There is a 3 minutes delay on power on. In order to protect the life of the compressor and electronic components please do not switch on the unit for at least 5 minutes after you turned the unit off.		

WIFI SETUP AND SMART FEATURES

WIFI SETUP

BEFORE YOU START

- Ensure your router provides a standard 2.4ghz connection.
- If your router is dual band ensure that both networks have different network names (SSID). The provider of your router / Internet service provider will be able to provide advice specific to your router.
- Place the air conditioner as close as possible to the router during setup.
- Once the app has been installed on your phone, turn off the data connection, and ensure your phone is connected to your router via wifi.

DOWNLOAD THE APP TO YOUR PHONE

Download the "TUYA SMART" app, from your chosen app store, using the QR codes below, or by searching for the app in your chosen store.





Android

IOS

CONNECTION METHODS AVAILABLE FOR SETUP

The air conditioner has two different setup modes, Quick Connection and AP (Access Point). The quick connection is a quick and simple way to set the unit up. The AP connection uses a direct local wifi connection between your phone and the air conditioner to upload the network details.

Before starting the setup, with the air conditioner plugged in, but turned off, press and hold the sleep button for 5 seconds (until you hear a bleep) to enter the wifi connection mode.

Please ensure your device is in the correct wifi connection mode for the connection type you are attempting, the flashing of the wifi light on your air conditioner will indicate this.


Connection Type	Frequency of Flashes
Quick Connection	Flashes twice per second
AP (Access Point)	Flashes once per three seconds

CHANGING BETWEEN CONNECTION TYPES



To change the unit between the two wifi connection modes, hold the Speed button for 3 seconds.


REGISTER THE APP

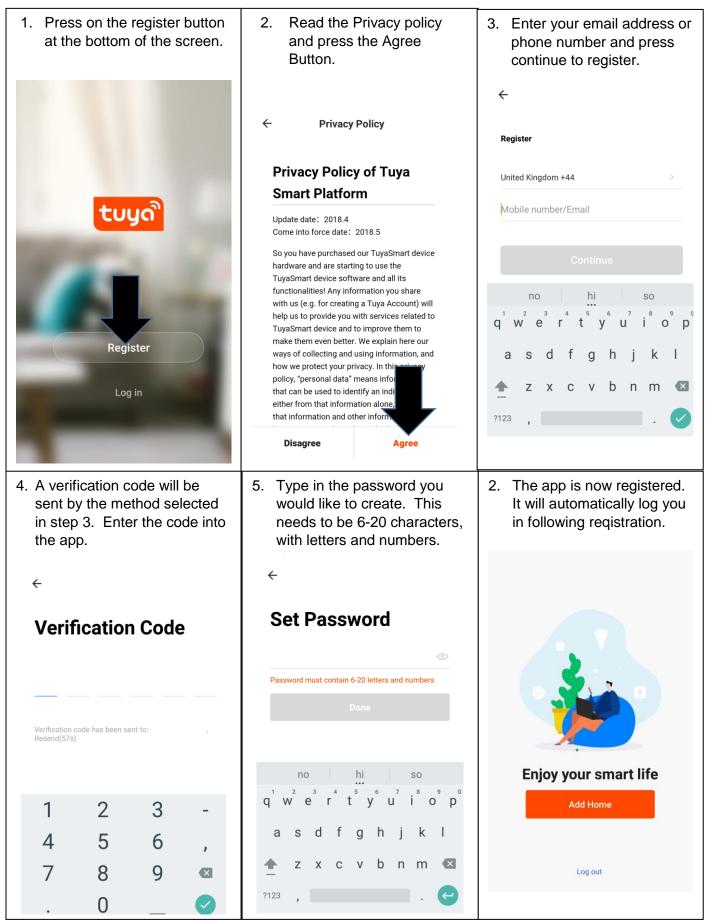

SETTING UP YOUR HOME WITHIN THE APP

TUYA is designed so it can work with a large number of compatible smart devices within your home. It can also be set up to work with multiple devices within different houses. As such during the setup process, the app requires that different areas are created and named to allow easy management of all your devices. When new devices are added, they are assigned to one of the rooms you have created.

CREATING ROOMS

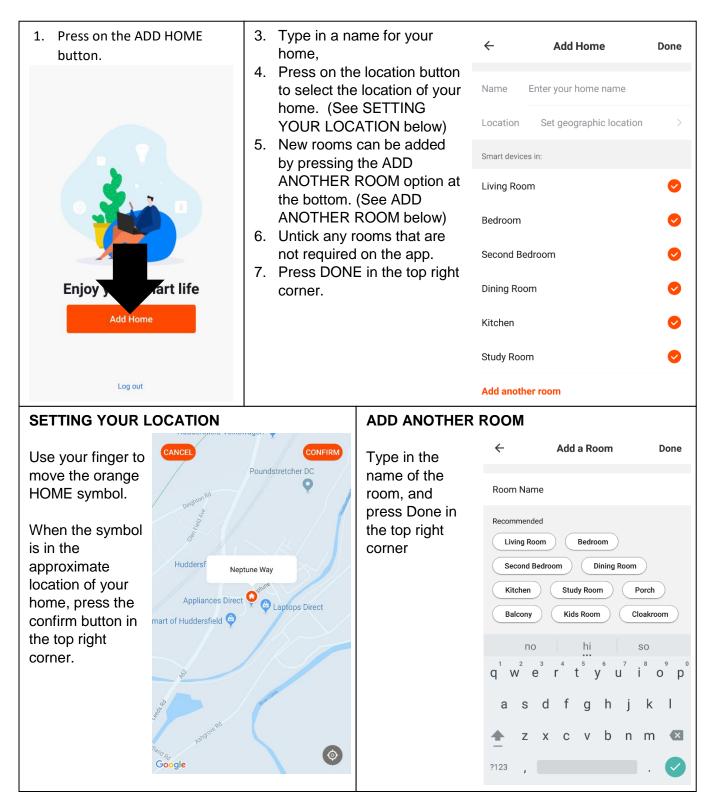

CONNECTING USING QUICK CONNECTION

Before initiating the connection, make sure the unit is in standby mode, with the WIFI light flashing twice per second. If not follow the instructions for changing the connection mode. Also ensure your phone is connected to the wifi network. (We advise turning mobile data off during setup)

 Open app and press "+" to add device, or use the add device button 	2. Select the type of device as "Air Conditioner"	3. Ensure the wifi light on the air conditioner is flashing twice per second, then press on
my home ~ +	← SELECT DEVICE TYPE	the orange button at the bottom of the screen to
19.3 °C Medi Outdoor Temp Outdoor AQ1 Outdoor Hu	No device to be connected Re-scan	confirm.
All Devices Living Room Bedroom 🔅	Wall switch >	ADD DEVICE AP Mode
	♀ Lighting devices >	
	\bigcirc Lighting devices (bluetooth-enabled) >	• ()
No Contract	Air conditioner >	
Add Device	Robot vacuum >	Power on the device and confirm that indicator light rapidly blinks
	Water heater >	
	E Heater >	
My Home Smart Scenes Profile	iiii heater >	How to make indicator rapidly blink
wy nome of natiodenes rione		Confirm indicator rapidly blink
4. Enter your wifi password and press confirm.	5. This will then transfer the settings to the air conditioner. Wait for this to complete. If this fails, retry. If still unsuccessful please review the troubleshooting section for further help.	
Cancel		
Enter Wi Ei nacoward	Connecting Now	
Enter Wi-Fi password	00/	
	8%	
Wi-Fi:SKYED58D Change network	Make sure your phone and device are as close to your router as possible.	
Confirm	 Searching for Device Registering device to the cloud 	
This app is supported only on 2.4GHz Wi-Fi channels	 Initializing your Device 	

CONNECTING USING AP MODE (ALTERNATIVE METHOD)

Before initiating the connection, make sure the unit is in standby mode, with the wifi light flashing once per second. If not follow the instructions for changing the wifi connection mode. Also ensure your phone is connected to the wifi network. (We advise turning mobile data off during setup)


1. Open app and press "+" to add device, or use the add device button my home ~ + 19.3 °C - Medi Vuidour Tamp Outdoor AQI Outdoor Hu.	2. Select the type of device as "Air Conditioner" ← SELECT DEVICE TYPE ☐ No device to be connected Re-scan ✓ Wall switch ✓ Lighting devices ✓ Lighting devices (bluetooth-enabled) ✓	3. Press on the AP mode button in the top right of the screen. Image: ADD DEVICE approximately approxima	
Not Pet Add Device	Air conditioner > Image: Air conditioner > Image: Air conditioner > Image: Air conditioner > Image: Water heater > Image: Heater >	How to make indicator rapidly blink	
Image: My Home Smart Scenes Profile	Oil heater >		
 Ensure the wifi light on the air conditioner is slowly flashing (once per three seconds), then press on the orange button at the bottom of the screen to confirm 	5. Enter your wifi password and press confirm.	6. Go to network settings in your phone and connect to the "SmartLife xxx" connection. There is no password to enter. Then return back to the app to complete setup.	
← ADD DEVICE		Wi-Fi 🗨	
	Cancel Enter Wi-Fi password	 SKYED58D Connected SmartLife-38C9 	
Power on the device and confirm that indicator light slowly blinks	Wi-Fi:SKYED58D Change network	💎 tarkus 💎 Virgin Media	
How to make indicator slowly blink Confirm indicator slowly blink	Confirm This app is supported only on 2.4GHz Wi-Fi channels		
This will then transfer the settings to the air conditioner.			

Once the connection process has completed, go back to the network settings on your phone to ensure your phone has reconnected to your wifi router.

CONTROLLING YOUR DEVICE THROUGH THE APP


THE HOME SCREEN

Add Device: Add a device to the app, and go through the setup process.

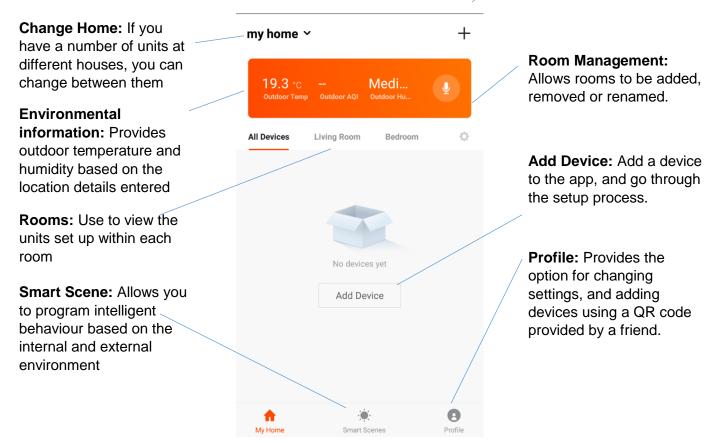


Each device has its own entry on the home screen to allow the user to either quickly turn the unit on or off, or to enter the device screen to make other changes.

DEVICE SCREEN

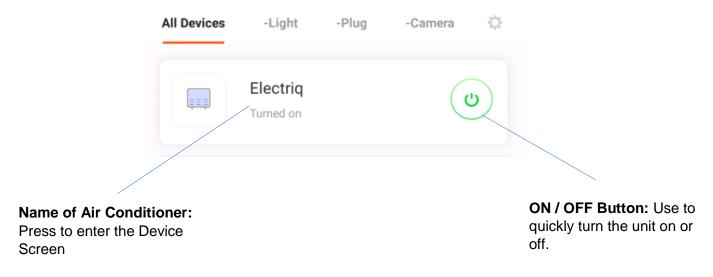

DEVICE SCREEN

The device screen is the main control screen for the air conditioner, providing access to the controls to amend the functions and settings

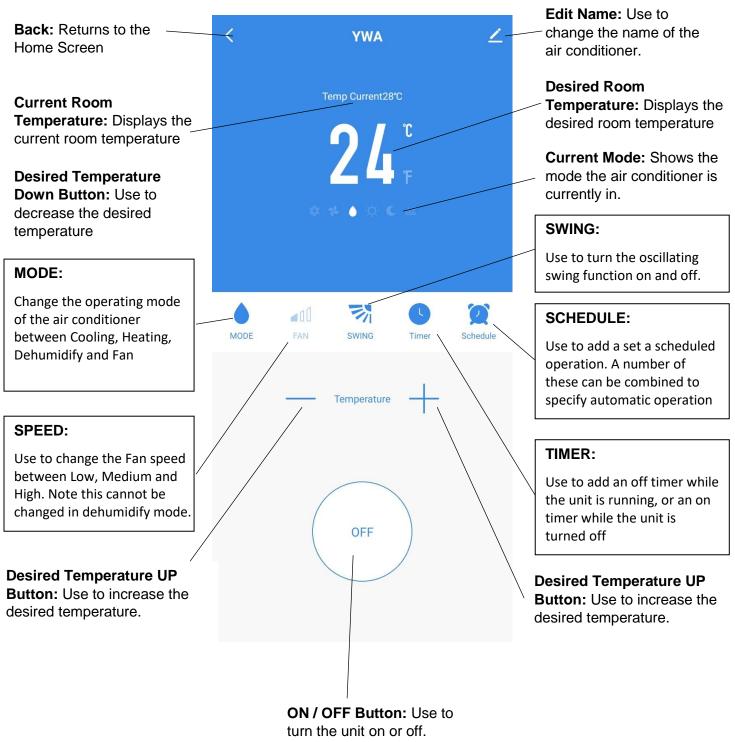

*Due to continuous development of the app, the layout and available features may be subject to change.


SMART SCENES

Smart Scenes is a powerful tool providing the option to customise the operation of the air conditioner based both on conditions within the room and outside influences. This gives the user the option of specifying much more intelligent actions. These are split into two catagories Scene and Automation.

SCENE

Scene allows for a one touch button to be added to the Home screen. The button can be used to change a number of settings in one go, and can change all the settings within the unit. A number of scenes can easily be setup, allowing the user to easily change between a number of preset configurations.


Below is an example of how to set up a scene:

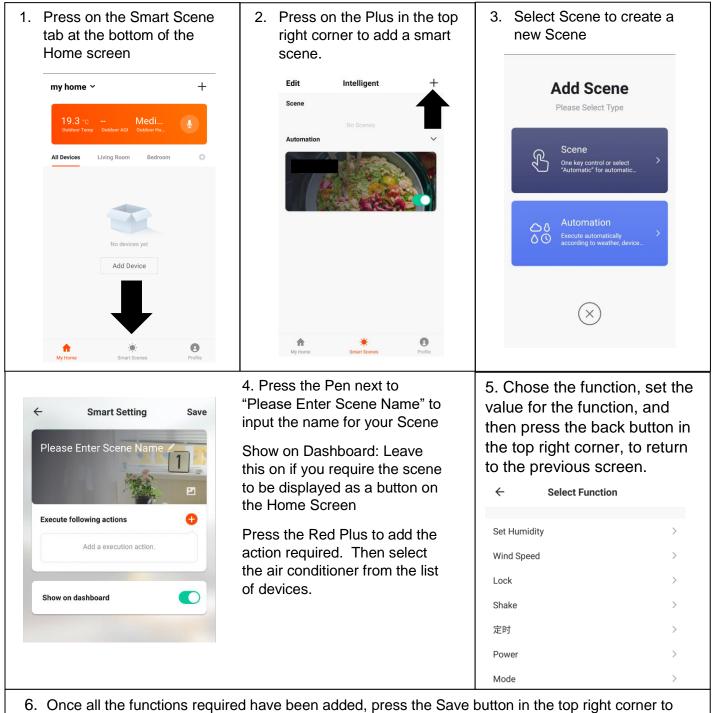

finalise and save your new Scene

AUTOMATION

Automation allows an automatic action to be set up for the device. This can be triggered by the Time, indoor temperature, humidity of the room, weather conditions, and a range of other influences.

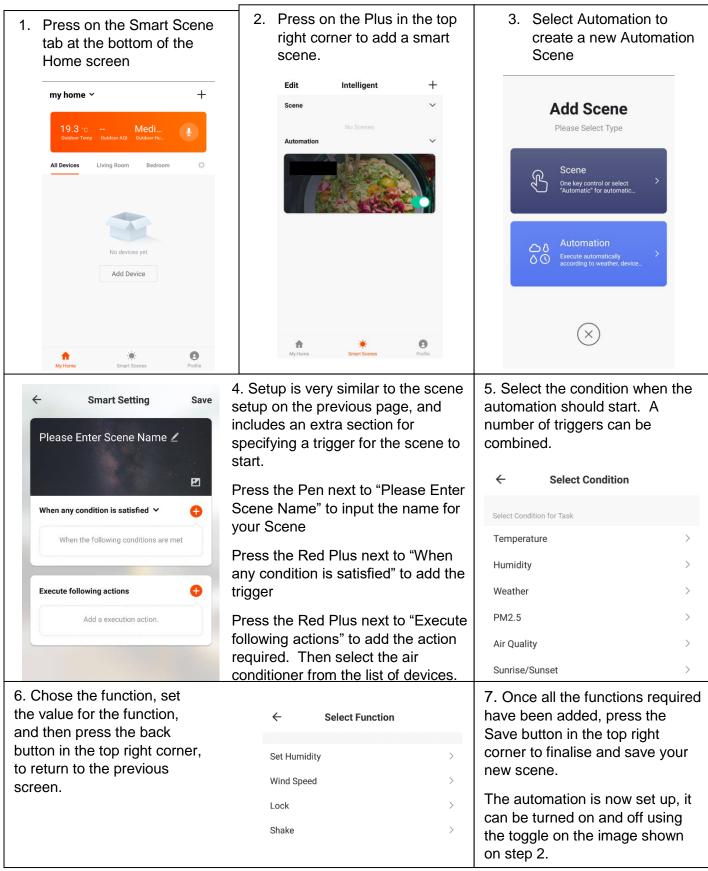

		PR
PROFILE	Settings	
		The
Tap to set your name	>	and
		CH/
🛞 Scenes	>	Whe devi
≪ Device Sharing	>	the you
☑ Message Center	>	to th Con
♡ Integration	>	sett
♡ Experience Center	>	DE\
🗄 Scan QR Code	>	This con
⑦ FAQ	>	INT
Feedback	>	This
^ ··· ·		hom Ama
Devices Scenes	Profile	7 11 10

PROFILE TAB

he profile tab gives you the option to edit both your detail, and use the added features of the unit.

CHANGING THE NAME OF YOUR DEVICE

When in any of the device screens further settings for the device can be accessed, by pressing on the three dots in the top right hand corner. The top option within this allows you to change the name of the device to something relevant to the use of the product, such as "Living Room Air Conditioner". Within the menu, you also have the option of setting up a pattern lock or change your password.

DEVICE SHARING

This allows you to share access to the controls of your air conditioner with friends and family.

INTEGRATION

This allows the unit to be integrated with your favourite home automation hardware such as Google Home and the Amazon Echo.

CONNECTION TROUBLESHOOTING

- 1. Check whether the device is powered on and is in the correct wifi connection mode, if not please refer to the CHANGING BETWEEN CONNECTION MODES section on page 12.
- 2. Ensure the wifi password has been entered into the app correctly (Case sensitive)
- 3. Check that the phone is connected to the wifi you are connecting the device to.
- 4. Ensure the network you are connecting it to is 2.4Ghz (5Ghz wifi networks are not supported), and that there is a strong wifi signal to the item.
- 5. If your router is dual band, ensure that the 2.4ghz network has a different network name (SSID). Further advice on changing router settings will be available from your Internet service provider / Router manufacturer.
- 6. Check the settings on the router. Encryption should be WPA2-PSK and authorisation type should be set to AES
- 7. Try using the alternative connection method. i.e. If connection is failing when attempting to connect through CF mode, try AP mode.

TROUBLESHOOTING

Do not repair or disassemble the air conditioning. Unqualified repair will invalidate the warranty and may lead to failure, causing injuries and property damage. Only use it as directed in this user manual and only perform operations advised here.

Problem	Reasons	Solutions
	There is no electricity.	Check the unit is plugged in, and the socket is working normally.
The air conditioner does not work.	The ambient temperature is too low or too high	Only use to use the machine with a room temperature between 7 and 35°C
	In cooling mode, the room temperature is lower than the desired temperature; in heating mode, the room temperature is higher than the desired temperature.	Adjust the desired room temperaure
	In dehumidification (dry) mode, the ambient temperature is low.	Ensure that the room temperature is above 17°C for dry mode.
	There is direct sunlight.	Use curtains to reduce heat from the sun
The cool is a subset	Doors or windows are open; there are a lot of people; or in cooling mode, there are other sources of heat (e.g. fridges)	Close doors and windows; increase air conditioning power
The cooling or heating effect is poor	The filters screen is dirty.	Clean or replace the filter screen.
	The air inlet or outlet is blocked.	Clear obstructions; make sure the unit is installed as per the instructions
The air conditioner is	The unit is not straight	Use a spirit level to check the unit is horizontal, if not remove from the wall and straighen
leaking	The drain pipe is blocked	Check the drain pipe to ensure it is not blocked or constricted.
Compressor does not work.	Overheat protection operational	Wait for 3 minutes until the temperature is lowered, and then restart the machine.
The remote control does not work.	The distance between the machine and the remote control is too far.	Let the remote control get close to the air conditioner, and make sure that the remote
	The remote control is not aligned with the direction of the remote-control receiver.	control directly faces to the direction of the remote-control receiver.
	Batteries are dead.	Replace batteries.

If problems not listed in the table occur or recommended solutions do not work, please contact the service centre.

Fault Code	Fault Description	Fault Code	Fault Description
F1	Compressor IPM error	FE	EE error(outdoor)
F2	PFC/IPM error	PA	Return air sensor temperature abnormal protection
F3	Compressor start error	P1	Over-heat protection on top of compressor
F4	Compressor running out of step	PE	Abnormal refrigerant circulation
F5	Location detection loop failure	РН	Exhaust temperature protection
FA	Phase current overcurrent protection	РС	Coil tube overload protection(outdoor)
P2	Dc bus voltage Undervoltage protection	E3	DC fan Feedback failure(indoor)
E4	Communication error(indoor and outdoor)	P6	Coil tube overload protection(indoor)
F6	PCB communication error	P7	Defrost protection on coil tube(indoor)
Р3	AC Input voltage protection	E2	Sensor error on indoor coil tube
P4	AC over-current protection	E1	Temperature sensor error(indoor)
Р5	AC undervoltage protection	P8	Zero-crossing fault detection(indoor)
F7	Coil sensor error(outdoor)	EE	EE error(indoor)
F8	Sensor on suction pipe error	E5	Water-splash motor error
EO	Sensor on discharge pipe error	E8	Fan feedback fault
E6	Temperature sensor error(outdoor)	FL	Water-full protection
E7	Fan motor error(outdoor)		

TECHNICAL DATA

MODEL	IQOOL-SMART12HP	
Capacity Cooling/Heating	2.93 / 2.35KW	
Rated Input Cooling / Heating	1120W / 745 W	
Running Current Cooling/Heating	6.0A	
Air Flow	500 m³/h	
EER rate	2.6	
Compressor	Rotary, 260g R290 gas	
Noise	58dB (A)	
Thermostat	16 - 30°C	
Moisture removal	24 litres/day	
Permitted Excessive Operating Pressure	0.8/2.8MPa	
Maximum Allowable Pressure	1.3/3.8MPa	
Power Supply	220-240V / 50Hz	
Net Weight	38Kg	
Dimension(L*D*H)	1000 x 205 x 585	
Unit must be vented outside when in Air Cooling and Heating mode. For the purposes of EU regulation EN12102 this is a local air conditioner and produces less than 65dB(A) sound energy.		

UK SUPPORT electriQ UK SUPPORT

www.electriQ.co.uk/support

Please, for your own convenience, make these simple checks before calling the service line.

- 1. Has the unit been standing upright for at least 2 hours?
- 2. Is the unit plugged into the mains?
- 3. Is the fuse OK?
- 4. Switch the unit off and wait three minutes to see if the issue is resolved. Restart the unit.
- 5. Check if the water tank is full.
- 6. Was the troubleshooting guide followed?

If the unit still fails to operate call: 0871 620 1057 or complete the online form

Office hours: 9AM - 5PM Monday to Friday

Unit J6, Lowfields Business Park, Lowfields Way, Elland West Yorkshire, HX5 9DA

DECLARATION OF CONFORMITY

Hereby, electriQ declares that this Portable air conditioner is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

https://www.electriQ.co.uk/content/declaration-of-conformity

Disposal: Do not dispose this product as unsorted municipal waste. Collection of such waste must be handled separately as special treatment is necessary.



Recycling facilities are now available for all customers at which you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating civic amenity sites run by their local councils. Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please contact the local council for details of your local household waste recycling centres.